

TRIEX.

powered by Trisun Energies

Energy Storage Solution 16kWh

TXL-16.07

Low Voltage Battery



KEY FEATURES



314Ah
Rated Capacity



8000
Lifecycle



LiFePO₄
Battery



Protection Class
IP20



90% Depth
of Discharge



Warranty
5 Years




Floor
Mounted Design



Superior Safety
and Stability

ADVANCED BMS

Engineered For Seamless Integration And
Reliable Performance

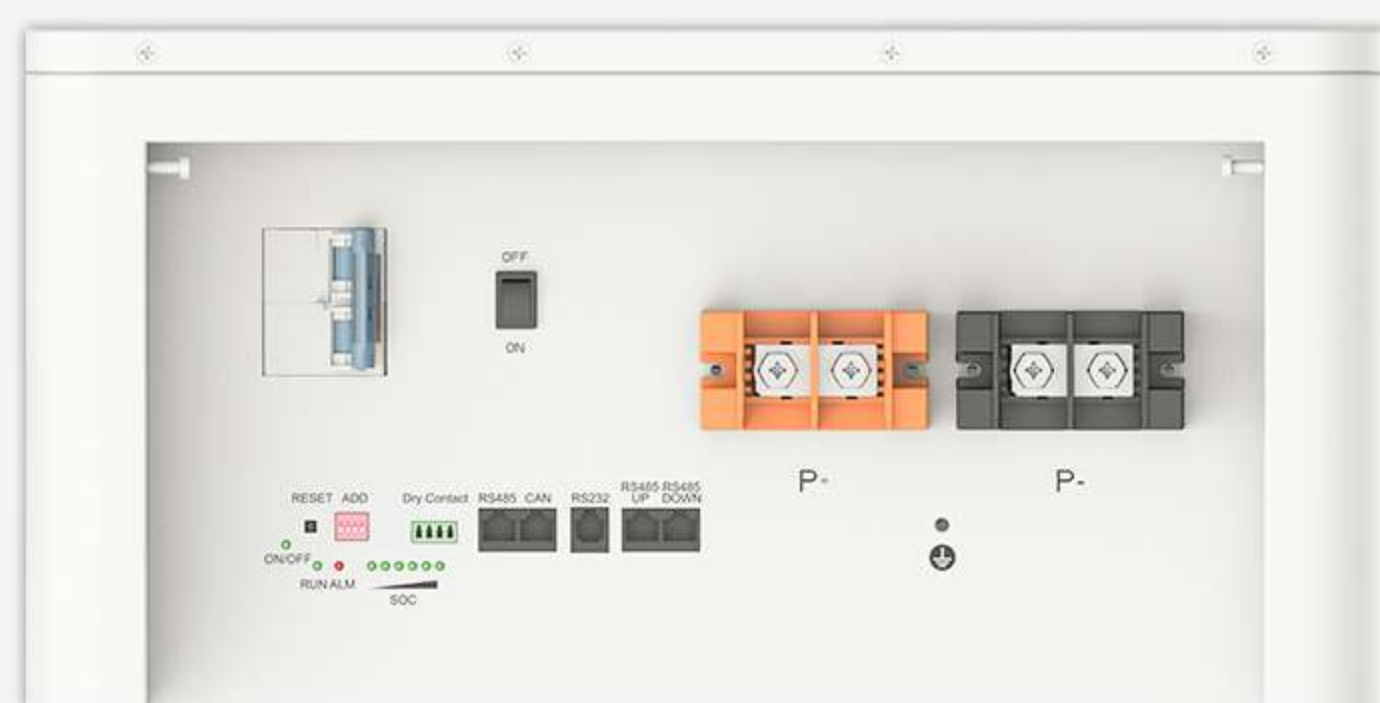

CERTIFICATES



www.triexbyte.com
info@triexbyte.com

TECHNICAL PARAMETERS

Battery Module	16kW
Cell Model	LFP 3.2V 314Ah
Combination mode	16S1P
Rated Energy	16.07KWh
Useable Energy	15.27kWh
Rated Capacity	314Ah @0.5C@25°C
Rated Voltage	51.2V
Voltage Range	43.2~57.6V
Rated Charge/Discharge Current	157A
Max Charge/Discharge Current	200A
Cycle Life	≥8000 cycles @70%EOL@80%DOD@0.5C/0.5C@25°C
Operation Temperature Range	Charge: 0~55°C Discharge: -20~55°C
Storage Conditions	≤3months @-20~45°C ≤6 months @0~35°C
Relative Humidity	5~95%
Altitude	≤4000m
Protection Grade	IP20
Installation Mode	Floor Mounted
Firefighting (Optional)	Aerosol
Max. Parallel Numbers	16
Communication	CAN / RS485 / RS232
Dimensions (WxHxD mm)	500*250*920, ±2
Weight (kg)	122±2kg
Certificates	CE, UN38.3

Note:

- Value for Battery Cell Only (Depth of Discharge 90%) Actual usable energy at the AC output may vary by condition, such as the battery converter inverter efficiency and temperature.
- TRIEX recommends 50A charge/discharge for maximum battery lifetime. Current and power may derate with temperature and SOC.